# VISOR CARRIER C/W 20cm POLYCARBONATE VISOR FOR EVO® RANGE

PRODUCT CODE: ANW060-230-008

Offers Protection Against Medium Energy High-Speed Particles At 120 m/s (270mph), Liduid Droplets And Molten Metal

# **TECHNICAL SPECIFICATION**

**HEAD PROTECTION** 

**ACCESSORIES** 

# **INSTRUCTIONS FOR USE**

In use ensure that the faceshield fits comfortably and securely on the head

Ensure that a suitable visor has been fitted with the protective film removed from it

Ensure the visor is in place before entering the hazard area

#### **VISOR PERFORMANCE**

Offers protection against medium energy high-speed particles at 120 m/s (270mph), liduid droplets and molten metal

The optical qualities of the visor comply with the requirements of optical class 1 (highest)

# **DIMENSIONS OF VISOR CARRIER & VISOR**

Length: 300mm

Width: 245mm

Height: 168mm


Thickness: 1mm

Weight: 202g (Approx.)

# **DIMENSIONS OF OUTER PACKAGING**

Quantity: 20

5.79g (Approx.) Weight:

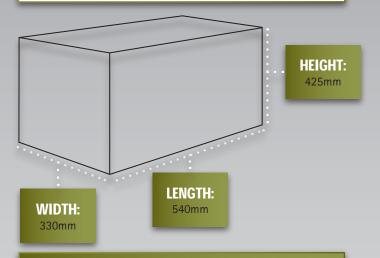

# CLEANING & MAINTENANCE

The unit may be cleaned with soap and warm water and dried

Do not clean with chemical or abrasive cleaners

Store out of direct sunlight away from chemicals and extremes of temperature



# **AVAILABLE FOR**









# LIMITATIONS OF USE

Protection will only be offered if the visor carrier and a visor are fitted correctly to a suitable Industrial Safety Helmet with the helmet attachment kit

If the visor or visor carrier becomes scratched or damaged they should be replaced

Do not apply paint, solvents, adhesives or self-adhesive labels, except in accordance with instructions from the manufacturer

The Industrial Safety Helmet harness, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the visor and Helmet and seek medical advice

Not suitable for use with all chemicals - if you are unsure contact your supplier or JSP for help and advice

# **CONFORMITY**

Meets the requirements of EN166

EC Type Examination Certificate Number 85724, issued by BSi **Product Certification** 

Markings: EN166 1.B.3.9

















