

# Our Products

#### Cable Safety - Dropped Objects Prevention - Confined Space Safety



CableSafe is powered by Westmark





#### Who we are

#### **CableSafe** is part of Westmark, a specialized engineering company

Our company consists of a group of Engineers with 40+ years of hands-on operational experience in the Oil & Gas, Chemical, Construction and Power Generation industry. We manufacture most of our safety products ourselves in the EU and some in North America reliability and quality.

Westmark started in 1991 as a manufacturer of CableSafe Safety Hooks. We specialize in Cable Safety, Confined Space Safety and Dropped Objects Prevention.



Locations: The Netherlands and USA

CableSafe is powered by Westmark









# **Cable Safety**

CableSafe is powered by Westmark



NL: +31 334614844 - US: 302-252-8272



info@cablesafe.com

### Safety Hook (S-Hook) EXTREME




The Safety Hook is used as safety product to suspend cables and hoses off the work floor.

**Safety Hook Extreme** designed for use in extreme environments. The extreme Hook is UV stabilized, Flame Retardant and Cold Weather Rated.

|                                |  | 0                   | <b>V</b>            |                    |  |  |
|--------------------------------|--|---------------------|---------------------|--------------------|--|--|
| ABLE AFE®<br>EXTREME           | 6"S  | 9"                  | 12"                 | 15"                |  |  |
| Size cable opening<br>(top)    | 1.1" = 2.7 cm  | 1.5" = 3.9 cm       | 2.1" = 5.4 cm       | 2.5" = 6.4 cm      |  |  |
| Size cable opening<br>(bottom) | 1.6" = 4.0 cm  | 2.6" = 6.6 cm       | 3.5" = 8.9 cm       | 4.5" = 11.4 cm     |  |  |
| Maximum load                   | 40 kg – 88 lbs   | 55 kg – 121 lbs     | 190 kg – 418 lbs    | 265 kg – 584 lbs   |  |  |
| Weight                         | 40 gram – 0.06 lbs   | 103 gram – 0.23 lbs | 292 gram – 0.64 lbs | 518 gram - 1.14 lb |  |  |
| Material                       | Glass reinforced polyester – injection molded product          |                     |                     |                    |  |  |
| Standard Color                 | O Yellow O Glow-in-the-dark                                    |                     |                     |                    |  |  |
| UV                             | Stabilized, guarantee 10 years - under normal usage conditions |                     |                     |                    |  |  |
| Flame Retardant                | Flame Retardant, UL Recognized, 94V-0 Flame Class Rating (3)   |                     |                     |                    |  |  |
| Cold Fatigue                   | Protection in cold weather environment                         |                     |                     |                    |  |  |





CAB

### **Safety Hook Range Extender**





The CableSafe Safety Hook Range Extender allows to hang Safety Hooks / Safety Hooks Extreme and cables on height up to 5 meter.

Length: 1,60 meter

- Extended length: 3 meter
- Weight: 1,3 kgs
- Height: up to 5 meter


CableSafe is powered by Westmark





# Safety Hook Light

Safety Hook Light are applied in maintenance, turnaround, construction industrial works as safety product to suspend hoses, cables and work gear off the work floor.

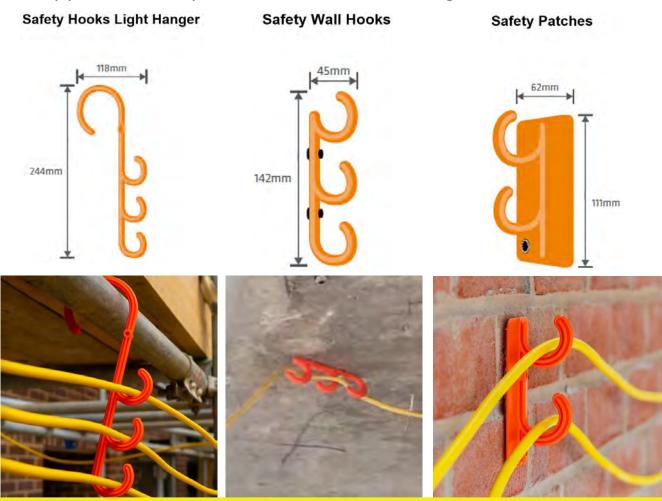



#### Safety Hook Light Hanger

- > Designed to be hung from scaffolding, cable trays, ceiling
- Ideal for holding up temporary lighting
- Holds 9 x 110v artic cable
- Can also be fixed to walls
- Working temperature -20°C 60°C
- Max load 5 kg

#### Safety Wall Hooks

- Perfect for long corridors and creating drop down points
- Use on walls and ceilings
- Working temperature -20°C 60°C
- Max load 10 kg


#### **Safety Patches**

- Can hold up to 6 x 110v artic cables
- No tools required to fit
- Working temperature -20°C 60°C
- Options: Grade 1; unfinished surfaces


- Grade 2; finished surfaces

- Magnetic





#### **Cable Guard**

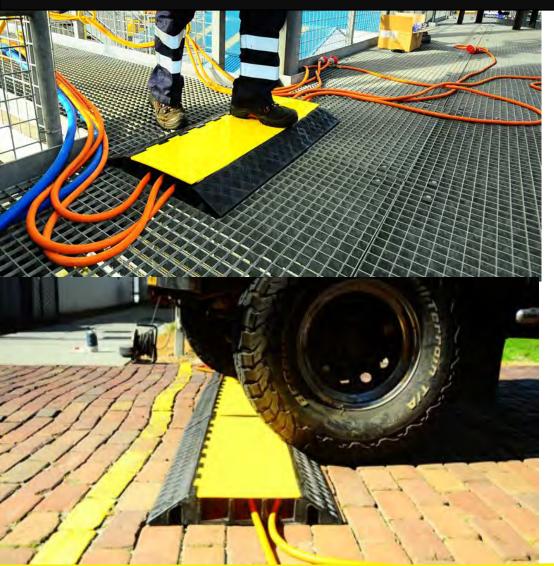

Avoid tripping accidents and damaged cables by using Heavy Duty Cable Guards & Covers to cover walkways and driveways.

- Polyurethane: lightweight design for heavy duty use
- Lighter, stronger and more durable than comparable products
- Identical size allows progressive upgrade for existing customers
- Connecting System: integrated male-female allowing cable guards to any length desired
- Inbuilt carry handle makes the heavy duty cable guards easy to carry one cable guard in each hand

#### Specific Models









2 channel

3 channel small

3 channel

CAB


5 channel

| Material  | Non-conductive, UV stabilized polyurethane |                     |   |  |  |
|---|--|---------------------|---|--|--|
| Dimensions (mm)   | (l)1000x(w)250x(h)45                       | (I)900x(w)300x(h)45 | (I)900x(w)500x(h)75                           | (l)900x(w)500x(h)50                              |  |
| Weight (kg)   | 4 kg                                       | 5.4 kg              | 12.7 kg<br>35% lighter than<br>rubber version | 9.8 kg<br>40% lighter than<br>rubber version     |  |
| Channel Dimensions<br>(mm)  | (w)35x(h)30                                | (w)30x(h)35         | (w)65x(h)55                                   | 4 channels: (w)34x(h)36<br>1 center: (w)40x(h)36 |  |
| Weight loading NATA<br>laboratory, tested per<br>tire for 5 minutes | 4T   | 8T                  | 6T  | 6Т   |  |
| Laboratory Fail Load  | 6.1T                                       | 13.1T               | 8.3T  | 11T  |  |
|   |  |                     |   |  |  |





#### **Cable Stand**

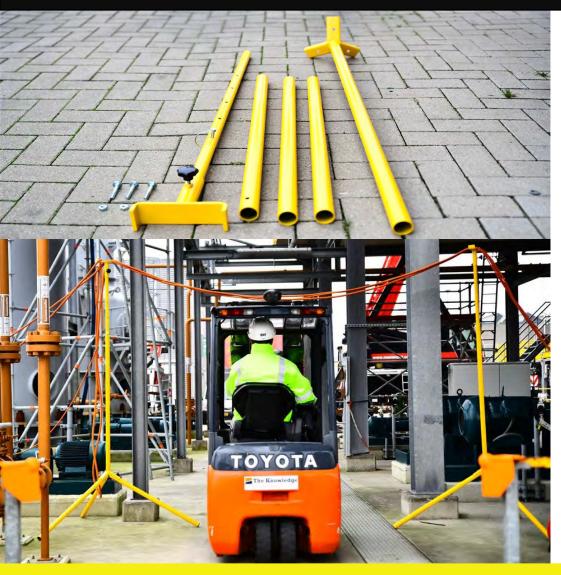

The CableSafe<sup>®</sup> Heavy Duty Cable Stand is the ideal product for keeping wires, cables and hoses off the floor.

- Holds up to 250 kg / 550 lbs
- Weight: 16,5 kg (36.5 lbs)
- Comes in three parts
  - 1. A base: width 130 cm (4 ft)
  - Extendable pole with two levers: min height 210 cm (7 ft) / max height 295 cm (10 ft)
  - 3. The lead grip: width 35 cm (14")





CableSafe is powered by Westmark





### **Cable Bridge**





#### Cable Bridge to suspend cables over a walkway


- Tested method to suspend cables and wires
- Provide a clean walkway or work location
- Holds up to 500 kg cable weight tested with 1.000 kg
- Material: constructed with standard steel
- Powder coated yellow, optional hot dip galvanized for use outside
- Height 2.25 meter; 2 meter length; 1.20 meter width [7.3 x 6.5 x 3.9 ft]
- Weight approximately 85 kg [190 lbs]
- Transported on standard pallets [1.2 m x 0.8 m]
- Custom sizes available on request











### **Dropped Objects Prevention Work Mat**






The Dropped Objects Prevention Work Mat is a tool which is used on elevated gratings. It allows personnel to store their tools on a safe mat and it will prevent dropped objects.

- Coated polyester mesh fabric
- Size: 220 x 120 cm
- Strength: tensile 200N/50mm (ENISO1421/V1); tear 400N (DIN53363)
- Temperature: -20 °C + 70 °C (EN 1876-1)
- German Fabric
- Flame Retardant and Fire Resistant (double coated polyurethane welding cloth 40g) available
- Supplied with spanners or magnets





### **Dropped Objects Prevention Walkway Mat**

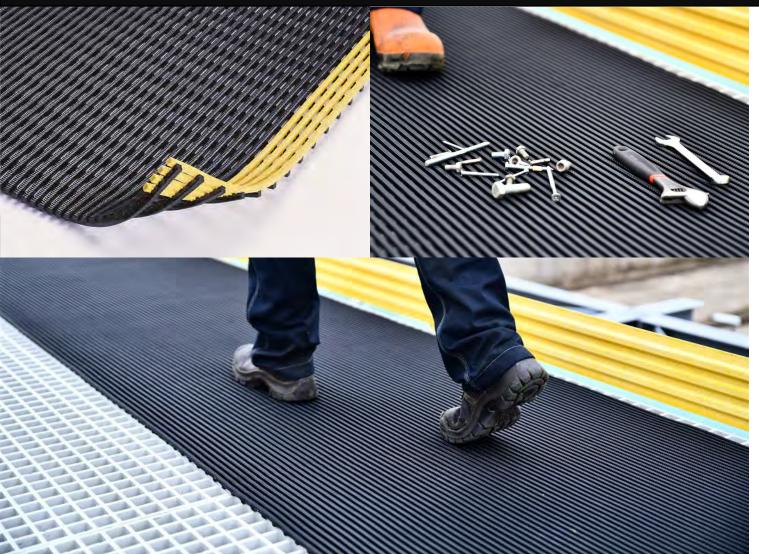



To prevent objects from falling through the gaps in elevated gratings and to prevent slips, trips and falls.

- Certified slip resistant (DIN 51130: R11)
- > ASTM 1677: 1.0/0.9)
- Excellent drainage (DIN 51130: V10)
- Fire resistant (EN ISO 13501-1:2007-Cfl-SI)
- Chemical, oil and acid resistant
- UV Stabilized
- Contours to uneven surfaces





### **Dropped Objects Prevention Safety Net Fit-to-size**



# Secondary retention safety nets preventing dropped object accidents

#### Only eight different sizes to fit almost all fixtures

- 250 x 250 x 250 mm
- 350 x 350 x 350 mm
- ➢ 450 x 450 x 450 mm
- > 500 x 500 x 500 mm
- ➢ 575 x 575 x 575 mm
- ➢ 650 x 650 x 650 mm
- 1000 x 200 x 150 mm
- ➤ 1650 x 300 x 450 mm

#### Materials included per Safety Net

- Safety Net Fit-to-size
- Lanyard / steel securing cable (to tether to structure)
- M8 Carabiner (to close & secure net around fixture and secure lanyard to structure)
- Stainless steel tag

#### Safe Work Loads

- Lanyard (4 mm AISI316) tested Safe Work Load is 164 kg (or 362 lbs)
- Safety Net Fit-to-size (2.5 mm AISI316) tested Safe Work Load is 54,6 kg (or 120 lbs)








# **Dropped Objects Prevention Safety Net Fit-to-size**

#### Installation recommendations









Start with the unit and the CableSafe Safety Net Fitto-size. Place the Safety Net around the unit.

Weave the stainless-steel lanyard through the Safety Net and close the Safety Net around the unit. Tighten the stainless-steel lanyard and attach end to a secondary attachment point (to a sound body or structure).





### **Dropped Objects Prevention Safety Net Roll**





#### Secondary retention net rolls preventing dropped object accidents

- Fast implementation: cut, wrap and attach onsite Standard dimensions
- Stock on hand: no need / delay for custom adaptation
- Economic: between 7-12 safety nets per roll
- Size: 10 m x 1.5 m

#### Safe Work Loads


- Lanyard (4 mm AISI316) tested Safe Work Load is 164 kg (or 362 lbs)
- Safety Net Roll (2.0 mm AISI316) tested Safe Work Load is 37,5 kg (or 82 lbs)
- Safety Net Roll (2.5 mm AISI316) tested Safe Work Load is 54,6 kg (or 120 lbs)

#### UNIQUE IN THE MARKET





### **Dropped Objects Prevention Safety Pouch**

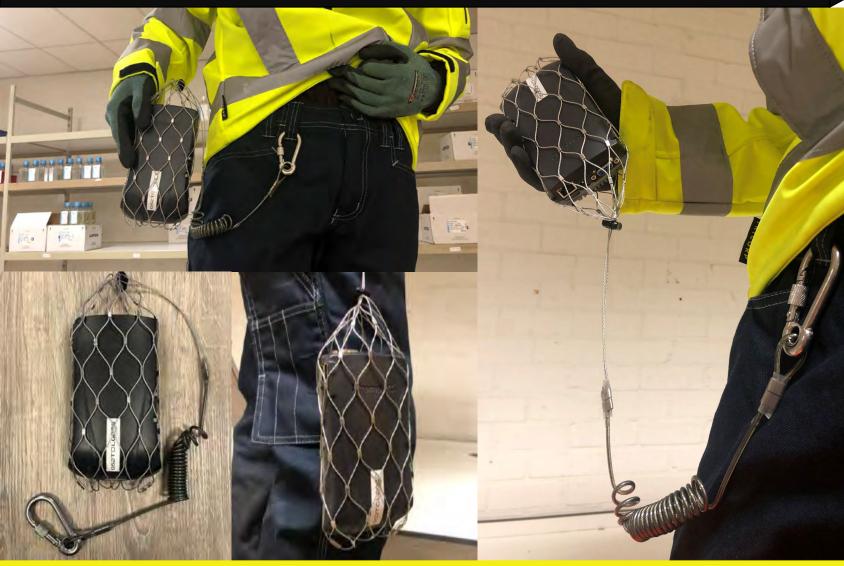



Secure technician items when working at height with Dropped Objects Prevention Safety Pouch Steel Wire Net

High quality stainless steel PVC coated net AISI316


- Including clip to tighten the net
- Delivered as bag format that fits around the handheld item
- Including stainless steel PVC coated coil lanyard

Items to place in the Safety Pouch:

- Portable gas detector
- Two-way radio (Walky Talky)
- Multimeter
- Other handheld items

CableSafe is powered by Westmark





### **Dropped Objects Prevention Phone Pouch**




Secure your mobile phone when working at height with Dropped Objects Prevention Phone Pouch



The Phone Pouch isn't only protective but also a very handy tool. It can be used as a means to keep in constant communication with your crew while on the job, ensuring that everyone is reachable at any given moment, without the risk of losing or dropping their phones.

- Fits on all phones
- Dropped objects prevention
- Easy to use

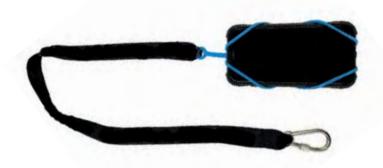





### **Self-Closing Safety Gates**

Same hinge for left and right swing direction



Attaches easily to: angle



pipe



Universal **Gravity-Closing** Safety Gate

NOC


Secure ladder openings and prevent fall form height with Self-Closing Industrial **Safety Gates** 

The only polyurethane TÜV tested safety gate to withstand an impact load of 400 lbs or 180 kg


- The gate design exceeds the requirements of ISO14122-3  $\geq$
- Designed for the most extreme outdoor elements including offshore tested temperatures -51°F / -46°C
- Available in 4 sizes:
  - UDG-22 (22"/560 mm)
  - UDG-27 (27"/690 mm)
  - UDG-32 (32"/820 mm)
  - UDG-37 (37"/950 mm)

#### **Benefits**

- Gate automatically closes by gravity
- Gate operates in all conditions
- $\geq$ Gate has a horizontal swing, not a vertical drop



CABI






1000 1020 100



### **Kick plates / Toe Boards**

CableSafe's wide range of Kick Plates and Toe Boards prevents dropped objects and secures walkways

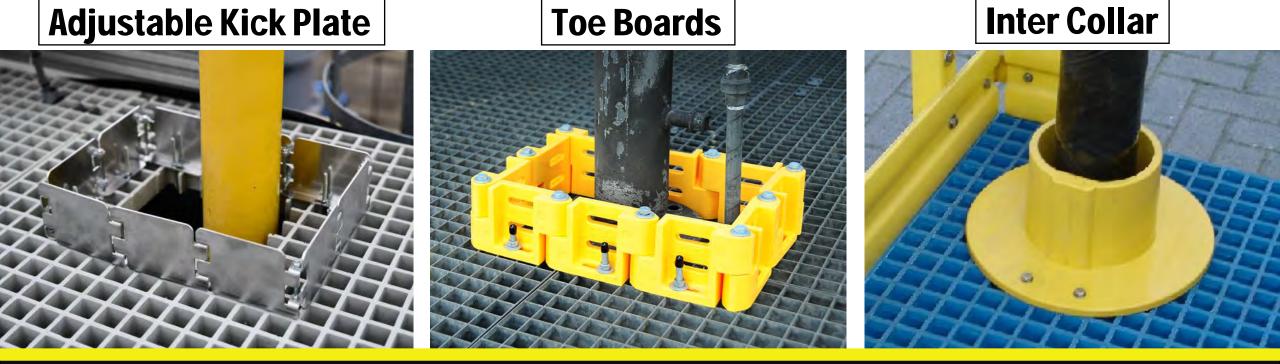

CableSafe is powered by Westmark







### **Dropped Objects Prevention Guard Net**





Dropped Object Prevention Guard Net is designed to prevent dropped objects while working at height

- Flame Retardant (FR) coated polyester mesh fabric including
- Flame retardant yellow hem at every side (awareness)
- Horizontal straps sewed in the fabric (top/middle/bottom) incl. ratchets galvanized or stainless steel
- Horizontal and vertical straps sewed in the fabric evenly distributed every 2 m (appr. 6 ft) incl. ratchets
- Galvanized or stainless steel ratchets
- Elastic spanners to tighten seam eyelets to railing or structure (every 300 mm / appr 1 ft)

CableSafe is powered by Westmark





### **Dropped Objects Prevention Panel Guard Net**






# Improve work safety by preventing dropped objects with panel guard net

- Lightweight / flame / chemical resistant
- Corrosion resistant in harsh environments
- Reusable and cost effective
- > No hot work permits required
- Permanent or temporary installations
- Fast and easy to install and remove
- > No painting or maintenance required

CableSafe is powered by Westmark





## **Dropped Objects Prevention Tool Tethering**


# CableSafe provides a complete solution for stopping tools and objects from being dropped when working at height

Step 1: Tool Tethering

Establish a certified tether point on your tool.









Step 3: Tool Lanyards

Select your certified lanyard

CAR







### **Fall Protection**

Keep your employees safe in a confined space, on the edge of a building or in a bucket truck with the CableSafe most innovative fall protection equipment.

**Harnesses:** Most comfortable Full Body Harness for extensive construction and service work with alternating attachment points including work positioning.

- Various adjustment possibilities
- Universal size



#### Lanyards:

- Integrated shock absorber
- Excellent shock absorbing performance
- Tested on edges r = 0,5 (suitable for horizontal use)





**Fall Arresters:** with steel snap hook MB51

for construction and service work, e.g. on roof and facade.


- Kernmantle rope Ø 12 mm
- Easy handling
- Tested on edges r = 0,5 (suitable for horizontal use)
- Excellent shock absorbing performance




**Slings:** Lanyard for creating or connecting anchorage points for up to 5 users.

- Polyester webbing, 27 mm wide
- Designed as loop
- Breaking strength: min. 30 kN
- Tested on edges r = 0,5 (suitable for horizontal use)
- Certified as anchorage device














CableSafe is powered by Westmark





### **Confined Space Entry Protection**

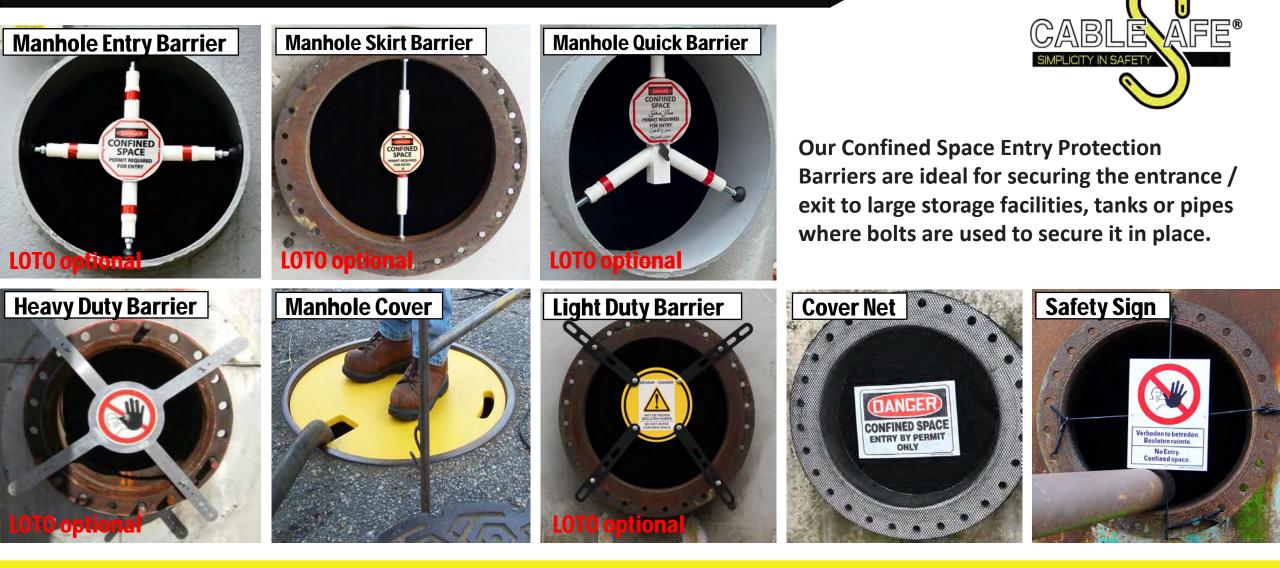





#### **FingerSaver**






The FingerSaver is intended to securely support / hold large spanners or flogging spanners in place during the removal of nuts and bolts





CableSafe is powered by Westmark





#### Ladder Guard






#### **Restrict access to ladders**

- Easily handled and installed by one person.
- Quick and simple to install / remove from almost any ladder size.
- Last well over 20 years.
- > Weight is 9 kg at 1800 mm x 380 mm wide
- 'Caution, Do not climb' label included on all Ladder Guards.
- Ladder Guards can be cut to your exact requirement free of charge.
- Padlock bracket included.
- Padlock supplied optional.

#### **Technical Data**

- Standard Size: 1800mm x 450mm (cut to size free of charge)
- Thickness: 6mm
- Material: Glass reinforced polyester (GRP)
- Suitable Environments: Internal, external, commercial and industrial
- > Applications: Ladders
- Fixing Method: Hook over at top. Padlock to bottom (optional)









### **Sharp Edges Corner Protection**





#### **Reduce injuries with sharp edges**

- High safety level
- Clear marking
- Sustainable materials, Reusable
- Applicable to steel (magnet), wood (Screws)
- Stackable so space saving

Temporary or permanent protection and clear marking

#### Characteristics

- Color: Orange
- Dimensions: 150 x 150 mm
- ➢ Weight: 254 gr
- Traction magnet: 65 kg
- Easy to mount on wooden constructions by means of screw or nail

CableSafe is powered by Westmark





### **Fast Deployable Net Barrier**



Fast deployable net barrier is the piece of equipment for setting up temporarily fencing


- 2 minutes installation
- Quick set-up in minutes by a single worker
- Carried by a single worker
- Click multiple systems together to cover large areas
- Take down without waste



CableSafe is powered by Westmark



NL: +31 334614844 - US: 302-252-8272



CAB

#### Harmonica Barrier



# For easy and quick solution for closing off entrances, raceways or walkways

- Deployed in seconds
- Can be set straight, curved or in a circle
- Folds to a compact package for storage
- Bright yellow for visibility
- Easy transport with wheels and handles
- Comes completely assembled for immediate use







#### CableSafe is powered by Westmark





#### **MultiFold Barrier**





Ideal for use in a range of settings, the CableSafe MultiFold Barrier is a must-have safety solution for events, construction sites, and other high-risk areas.

- Deployed in seconds
- Can be placed straight, curved or in a square
- Folds to a compact package for storage
- Bright yellow colour with reflection for visibility





### **Our locations**



CableSafe is powered by Westmark



