

# A2P3 COMBINATION CARTRIDGES

## A2P3 R - PRESSTOCHECK™ F-4123

TWIN FILTER CARTRIDGES FOR THE FORCE™ 8 HALF FACE MASK  
AND FORCE™ 10 FULL FACE MASK

### TECHNICAL SPECIFICATION

### RESPIRATORY PROTECTION

#### INSTRUCTIONS FOR USE

Follow the instruction supplied to fit the filters to the mask in the correct way

Align the arrows on the mask and filter. Twist the cartridge clockwise into the facemask inlet using the easy bayonet fitting

Care must be taken to ensure that the correct filter type is selected for the work to be carried out

If in doubt as to the type of filter required seek professional advice

#### PERFORMANCE

Offers an assigned protection factor (APF) of 10 x Workplace Exposure Limit (WEL) against organic vapours and gases fine dusts, fibres, fumes and liquid aerosols when attached to a Force™ 8

Offers an assigned protection factor (APF) of 20 x Workplace Exposure Limit (WEL) against organic vapours and gases fine dusts, fibres, fumes and liquid aerosols when attached to a Force™ 10

#### DIMENSIONS OF PRODUCT

Height: 63mm

Length: 101mm

Width: 68mm

Weight: 116g (Approx.)

#### PACKAGING DIMENSIONS

**Inner Packaging:** (Quantity: 2 Filter Per Bag )

Height: 280mm Width: 10mm Length: 156mm

Weight: 260g (Approx)

**Outer Packaging:** (Quantity: 10)

Height: 180mm Width: 250mm Length: 340mm

Weight: 3kg (Approx)

#### MATERIALS

Cartridge Body: ABS

Cartridge Inner: Activated carbon and man-made materials

#### CLEANING & MAINTENANCE

Wipe with damp cloth soaked in mild detergent solution, being careful not to get any liquid inside the cartridge

Do not use abrasive substances or solvents

Cleaning the filter does not extend its life

Store unopened packs in an airtight container, out of direct sunlight away from chemicals, abrasive substances and in a dry atmosphere




#### CONFORMITY

Meets the requirements of EN14387:2004 + A1:2008

EU Type Examination Certificate 677404, issued by BSI Product Certification

Markings: A2P3 R, EN14387:2008

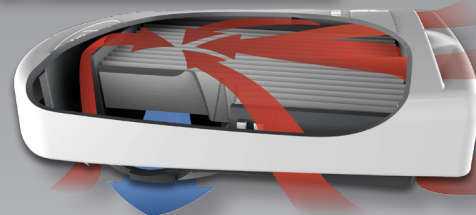

#### LIMITATIONS OF USE

Protection will only be offered if the cartridge is fitted correctly to an appropriate respirator

The use by date is printed on the outside of the container

The working life of the filter depends on many factors including work rate, airflow and concentration of any contaminant in the atmosphere

The filter should be changed immediately if:

- Breathing difficulties due to clogging are experienced
- Chemical breakthrough of a contaminant is detected by smell, taste or any other means
- The filter becomes damaged

Use in well ventilated areas only, which are not deficient in oxygen and do not contain explosive atmospheres

Bayonet style filters should never be made to fit masks with any other fitting type

**DISCLAIMER:** Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email [technical@jgpsafety.com](mailto:technical@jgpsafety.com).



MANUFACTURING FOR SAFETY  
[WWW.JGPSAFETY.COM](http://WWW.JGPSAFETY.COM)

UKSALES@JGPSAFETY.COM  
TEL: +44 (0)1993 826050



Issued 30/10/2018 V4