

# FORCEFLEX® 3 CLEAR / SMOKE / AMBER LENS (K&N)

PRODUCT CODE: ASA460-0\_\_ - 00

FLEXIBLE AND STRONG HIGH PERFORMANCE EYEWEAR

## TECHNICAL SPECIFICATION

EYE & FACE PROTECTION

### INSTRUCTIONS FOR USE

In use ensure that the safety spectacles fit comfortably and securely on the head

Ensure that the safety spectacles are in place, before entering the hazard area



**TEMPLE:**  
Thermoplastic Elastomer

**LENS:**  
Polycarbonate

**NOSE PAD:**  
Thermoplastic Rubber

## FORCEFLEX® FF-3

### FORCEFLEX® 3 FEATURES & PERFORMANCE

Forceflex® 3 is engineered with patented technologies to create a flexible high performance safety spectacle.

i-Form™ frame adjust perfectly to any head size, eliminating pressure points and providing maximum comfort.

Combination of latest materials and processes creating ultra-light, highly protective eyewear.

Dust dam accessory pack available



### CLEANING & MAINTENANCE

The safety spectacles may be cleaned with soap and warm water and dried with a soft cloth

Do not clean with chemical or abrasive cleaners

The eye shield should be stored out of direct sunlight, away from chemicals and not exposed to extremes of temperature

### CONFORMITY

Conforms to EN 166.1.FT.K.N & ANSI Z87.1

EC Type-Examination Certificate Number 682745

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email [technical@jpsafety.com](mailto:technical@jpsafety.com)



MANUFACTURING FOR SAFETY  
[WWW.JSPSAFETY.COM](http://WWW.JSPSAFETY.COM)

UKSALES@JSPSAFETY.COM  
TEL: +44 (0)1993 826050



Issued 11/12/19, V5

# FORCEFLEX® 3 CLEAR / SMOKE / AMBER LENS (K&N)

## TECHNICAL SPECIFICATION

PRODUCT CODE: ASA460-0 - 00

FLEXIBLE AND STRONG HIGH PERFORMANCE EYEWEAR

EYE & FACE PROTECTION

### DIMENSIONS OF SPECTACLE

Lens Thickness: 2.2mm
Lens Base: 10
Lens Size (Diagonal): 56mm
Bridge: 15mm
Temple Length (Lens to tip): 168mm
Overall Width: 140mm
Closest point between lens: 15mm
Closest point between temple tips: 60mm
Weight: 28g / Weight with accessories fitted: 50.5g




## FORCEFLEX® FF-3

### DIMENSIONS OF OUTER PACKAGING

Quantity: 120
Weight: 9.6kg (Approx.)

### DUST DAM KIT ACCESSORY KIT

Product Code: ASU600-000-000
Quantity: 120
L: 356mm, W: 290mm, H: 570mm
Weight: 4.8kg (Approx.)

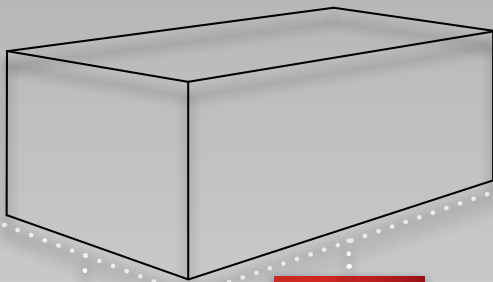

**HEIGHT:**  
455mm

**WIDTH:**  
510mm

**LENGTH:**  
290mm



### MARKINGS

Frame: EN166 1.FT
Clear Lens: EN170 2C-1.2 ↑ 1.FT.K.N
Smoke Lens: EN172 5-2.5 ↑ 1.FT.K.N
Amber: EN170 2-1.2 ↑ 1.FT.K.N

### LIMITATIONS OF USE

Protection will only be offered if the safety spectacles are fitted correctly

If the safety spectacles become scratched or damaged they should be replaced, likewise if the safety spectacles are subjected to severe impact they should be replaced immediately

Do not apply paint, solvents, adhesives or self-adhesive labels, except in accordance with instructions from the manufacturer

The safety spectacles, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the eye shield and seek medical advice

The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer

Forceflex® 3 is not suitable for protection against dusts, liquids or molten metals

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email [technical@jpsafety.com](mailto:technical@jpsafety.com)



MANUFACTURING FOR SAFETY  
[WWW.JSPSAFETY.COM](http://WWW.JSPSAFETY.COM)

UKSALES@JSPSAFETY.COM  
TEL: +44 (0)1993 826050



Issued 11/12/19, V5