# STEALTH 169 CLEAR - ANTI MIST / ANTI SCRATCH

**TECHNICAL** 

EYE & FACE PROTECTION

HINGE:

PRODUCT CODE: ASA920-1A1-300

THE WORLDS MOST LIGHTWEIGHT SPECTACLE WITH NEXT GENERATION 9.5 BASE CURVE

# **INSTRUCTIONS FOR USE**

In use ensure that the safety spectacles fit comfortably and securely on the head

Ensure that the safety spectacles are in place, before entering the hazard area



## STEALTH™ 16g FEATURES & PERFORMANCE

The world's lightest safety eyewear

Next generation dual 9.5 base

LENS:

**NOSE PIECE:** 

Ultra thin and ultra strong optically perfect lenses

Vented side arms and integral universal nosebridge

Maximum comfort for all day use

Lenses include Hardia™ Anti-Scratch 'K' or PremierSHIELD™ Anti-Scratch & Anti-Mist 'KN'

Lenses filter out more than 99.9% of harmful UV light



### **CLEANING & MAINTENANCE**

The safety spectacles may be cleaned with soap and warm water and dried with a soft cloth

Do not clean with chemical or abrasive cleaners

The eye shield should be stored out of direct sunlight, away from chemicals and not exposed to extremes of temperature



#### **CONFORMITY**

Conforms to EN166.1.F.KN + EN170 & ANSI Z87.1

EC Certificate Number 726, issued by Inspec Certification Limited















# TEALTH™ 16g

CLEAR - ANTI MIST / ANTI SCRATCH

HEIGHT:

TECHNICAL

EYE & FACE PROTECTION


PRODUCT CODE: ASA920-1A1-300

THE WORLDS MOST LIGHTWEIGHT SPECTACLE WITH NEXT GENERATION 9.5 BASE CURVE

#### **DIMENSIONS OF INNER PACKAGING**

Quantity: 10

Weight: 0.379kg (Approx.)




# WIDTH:

LENGTH:

### **DIMENSIONS OF OUTER PACKAGING**

Quantity: 120

Weight: 5.1kg (Approx.)

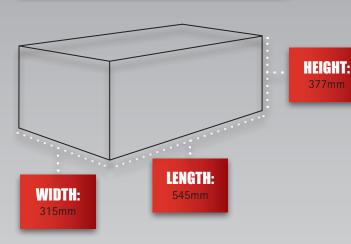

#### DIMENSIONS OF SPECTACLE

Lens Thickness: 1.4mm

Lens Base: 9.5 curve

Lens Size (Vertical): 43.3mm

Lens Size (Diagonal): 71.4mm

Bridge: 13.4

Temple Length (Lens to tip): 164mm

Overall Width: 136.3

Closest point between lens: 12mm

LIMITATIONS OF USE

Closest point between temple tips: 63~66mm

Weight: 16g

Protection will only be offered if the safety spectacles are fitted correctly

If the safety spectacles become scratched or damaged they should be replaced, likewise if the safety spectacles are subjected to severe impact they should be replaced immediately

Do not apply paint, solvents, adhesives or self-adhesive labels, except in accordance with instructions from the manufacturer

The safety spectacles, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the eye shield and seek medical advice

The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer

The Stealth 16g is not suitable for protection against dusts, liquids or molten metals

# MARKINGS

Frame: EN166 1.F

Clear Lens Hardia+™: EN170 2C-1.2 1.F.K

Clear Lens PremierSHIELD™: EN170 2C-1.2 1.F.K.N

Smoke Lens Hardia+™: EN172 5-2.5

> **UKSALES@JSP.CO.UK** UKSALES@JSP.CO.UK Tel: +44 (0)1993 826050 © © © © ©

















1.F.K