STEALTH 9200™

TECHNICAL **SPECIFICATION**

EYE & FACE PROTECTION

A UNIQUE COMBINATION OF INDIRECT VENTED GOGGLE AND FACE PROTECTION WITH A SLEEK, MODERN DESIGN, ENGINEERED TO OFFER OUTSTANDING PERFORMANCE, COMFORT AND LOOKS

INSTRUCTIONS FOR USE

In use ensure that the safety goggles fit comfortably and securely on the head

Ensure that the safety goggles and faceshield are in place, before entering the hazard area

STEALTH 9200™ FEATURES & PERFORMANCE

Lighter than a standard faceshield

Faceshield can be lifted out of the way when not in use Protective disposable peel offs available. (The peel off's for Filterspec also fit this product)

EN170 UV protection 2-1.2

Dust, liquid splash, molten metal protection, extreme temperature protection, UV protection 99.9%.

Conforms to EN166 1B.T.3.4.9.N & EN170 2-1.2

Indirect vented, Class 1 Optics and N class Antimist. B grade impact at extremes of temperature.





CLEANING & MAINTENANCE

The goggle and faceshield may be cleaned with soap and warm water and dried with a soft cloth

Do not clean with chemical or abrasive cleaners

Store in packaging provided, out of direct sunlight, away from chemicals and not exposed to extremes of temperature

CONFORMITY

Conforms to EN166 1B.T.3.4.9.N & EN170 2C-1.2

EC Certificate Number 0726, issued by INSPEC Certification Limited



STEALTH 9200™ ATTRIBUTES

Anti Mist

Anti Scratch

Molten Metal Protection

UV Protection

Indirect Vented

Extremely Comfortable

High Level Of Protection

Removeable Faceshield

B Grade Impact Protection

MATERIALS

Frame: Polyvinyl Chloride

Lens: Polycarbonate

Headband: Textile Elastic (Nylon Wooly)

Headband Fittings: Polycarbonate

Faceshield: Polycarbonate



















STEALTH 9200TM CLEAR - ANTI-MIST / ANTI-SCRATCH (N)

TECHNICAL **SPECIFICATION**


EYE & FACE PROTECTION

A UNIQUE COMBINATION OF INDIRECT VENTED GOGGLE AND FACE PROTECTION WITH A SLEEK, MODERN DESIGN, ENGINEERED TO OFFER OUTSTANDING PERFORMANCE, COMFORT AND LOOKS

DIMENSIONS OF OUTER PACKAGING

Quantity: 30

Weight: 7.9kg (Approx.)

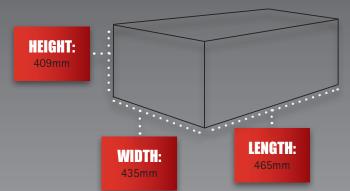

DIMENSIONS OF GOGGLE

Lens Thickness: 3mm

Lens Size (Vertical): 57mm

Lens Size (Horizontal): 207mm

Overall Length (lens edge): 230mm (Approx.)

Strap Length: 315mm (Approx.)

Height: 81mm

Width: 78mm

Weight: 122g (Approx.)



DIMENSIONS OF STEALTH 9200™

Height: 180mm

Width: 193mm

Length: 135mm

Strap Length: Min: 282mm Max: 310mm (Approx.)

Weight: 207g (Approx.)

LIMITATIONS OF USE

Protection will only be offered if the goggles are fitted correctly

If the lens become scratched or damaged they should be replaced, likewise if the goggles are subjected to severe impact they should be replaced immediately

Do not apply paint, solvents, adhesives or self-adhesive labels, except in accordance with instructions from the manufacturer

The goggle body, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the eye shield and seek medical advice

The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer

Lens: Clear

Body: Grey Tint

MARKINGS

STEALTH 9200™ COLOURS

Body: EN166 3.4.9.BT

Lens: EN166 1.BT.9 EN170 2C-1.2

















