TRAFFIC MIRRORS



TM traffic mirrors



Ice-free traffic mirrors





TM-I traffic mirrors



4-point ball-joint mounting bracket





Multi-use mirrors



2-point universal bracket



Mirror Subway



Mirror Panorama 180°







Traffic Mirrors


		99
2-point universal mount Art. No.: 747.04-0	Telescopic wall mount Art. No.: 747.11-2	Telescopic wall mount for EC- models Art. No.: 747.11-1
Art. No. 3094	Telescopic wall mount Art. No.: 747.10-6	Wall arm Art. No. 3093
Bracket for square posts Art. No. 3098	Trixi bracket Art. No. 3099	Fork arm Art. No. 3096
Mirror mount Type III Art. No.: 747.03-4		
	Art. No.: 747.04-0 Art. No. 3094 Art. No. 3094 Bracket for square posts Art. No. 3098	Art. No.: 747.04-0Art. No.: 747.11-2Art. No.: 747.11-2Image: Constraint of the second seco

MATERIAL OVERVIEW

	Acrylic	Polycarbonate	Inox
	70 % more impact restistant than glass	Nearly indestructible	Nearly indestructible
Material	UV-stable	UV-stable	UV-stable
	Low weight	Low weight	High temperature resistance
	Impact resistant according to DIN EN ISO 179-1	Low flammability	Chemical resistance



TRAFFIC MIRRORS

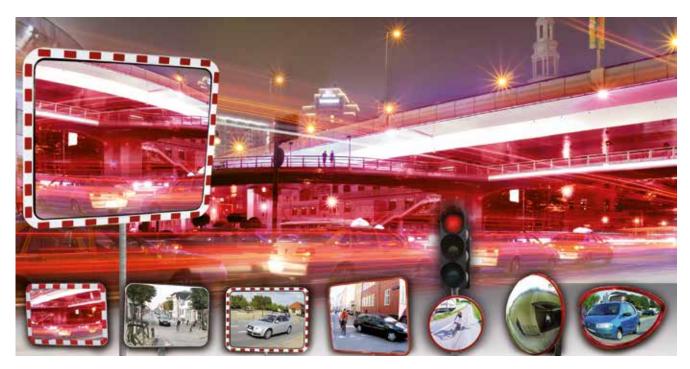

The TÜV-certified DANCOP mirrors are characterized by very solid and durable construction. All DANCOP mirrors have a metallized backside, which enables a very clear and brilliant image and a high resistance against environmental influences.

All DANCOP traffic mirrors are UV-stable and equipped with robust fixing brackets that are always included in the delivery. Our standardmaterial acrylic is 70 % more shock-resistant than glass.

The advantages of DANCOP-mirrors:

- UV-stable
- Brilliant mirror image without distortion
- Easy installation

Finding the correct mirror		
1. Application	Indoor use Outdoor use	
2. Material	Acrylic: 70 % more shock-resistant than glass Polycarbonate: nearly indestructible INOX: temperature resistance and chemi- cal resistance	
3. Size / fixing	The bigger the mirror, the better the visibili- ty and representation	

For items as per description:

- Most massive fixing on the market: 4-point ball joint mounting bracket
- Fixing for round or rectangle post or wall fixing included
- Wind load-tested until wind force 12 (hurricane > 117 km/h)

Product video



Scan me!



Our mirrors are TÜV certified





Wind load certified up to force 12



Our TM-mirror is equipped with a white frame with red reflecting RA2 foil for a better visibility on the streets.





Photo: Back side: 4-point fixing with ball joint for an optimal fixation. Included in scope of delivery.

Art. No.	Description	Weight	Viewing distance
TM AC 60	Acrylic, round ø 60 cm	5,2 kg	9 - 15 m
TM AC 80	Acrylic, round ø 80 cm	7,6 kg	15 - 22 m
TM AC 40 X 60	Acrylic 40 x 60 cm	5,0 kg	9 - 15 m
TM AC 60 X 80	Acrylic 60 x 80 cm	8,8 kg	15 - 22 m
TM AC 80 X 100	Acrylic 80 x 100 cm	12,0 kg	22 - 27 m
TM AC 100 X 120	Acrylic 100 x 120 cm	15,0 kg	27 - 32 m
TM PC 60	Polycarbonate, round ø 60 cm	5,1 kg	9 - 15 m
TM PC 80	Polycarbonate, round ø 80 cm	7,5 kg	15 - 22 m
TM PC 40 X 60	Polycarbonate, 40 x 60 cm	5,2 kg	9 - 15 m
TM PC 60 X 80	Polycarbonate, 60 x 80 cm	6,3 kg	15 - 22 m
TM PC 80 X 100	Polycarbonate, 80 x 100 cm	12,5 kg	22 - 27 m
TM INOX 60	Inox, round ø 60 cm	8,3 kg	9 - 15 m
TM INOX 80	Inox, round 80 cm	10,0 kg	15 - 22 m
TM INOX 40 X 60	Inox, 40 x 60 cm	10,0 kg	9 - 15 m
TM INOX 60 X 80	Inox, 60 x 80 cm	12,1 kg	15 - 22 m



Traffic Mirrors TM-B INOX ICE-FREE TRAFFIC MIRROR







Traffic mirror video

Material

Inox

Video of the fixing of the mirror 4-point fixing

Application Outdoor and indoor

The combination of the INOX mirror surface and the built-in special cushions in the back prevent ice formation on the mirror surface.

Please be aware that our ice-free mirror can fog-up in cases of fast arising and freezing fog, or in exceptionally cold periods without temperature fluctuations.



Photo: round type



Fixing

Post or wall

Warranty

5 years

Photo: Back side: 4-point fixing with ball joint for an optimal fixation. *Included in scope of delivery.*

Art. No.	Description	Weight	Viewing distance
TM-B INOX 60	lnox, round ø 60 cm	12,2 kg	9 - 15 m
TM-B INOX 80	Inox, round 80 cm	14,8 kg	15 - 22 m
TM-B INOX 40 X 60	Inox, 40 x 60 cm	10,1 kg	9 - 15 m
TM-B INOX 60 X 80	Inox, 60 x 80 cm	17,3 kg	15 - 22 m



Traffic Mirrors TM-I TRAFFIC MIRROR

Including 4-point ball joint mounting bracket for precise installation





Video mirror mount 4-point ball joint mount

Application Outdoor and indoor

Our TM-I mirror increases the safety in private and industrial areas. Parking lots, private driveways, shopping centers, and railway platforms are popular operation sites as well. The red frame further enhances the visibility.



Photo: round design



Fixing

Warranty

5 years

Photo: Back side: 4-point fixing with ball joint for an optimal fixation. Included in scope of delivery.

Art. No.	Description	Weight	Viewing distance
TM-I AC 50	Acrylic, round ø 50 cm	4,2 kg	5 - 7 m
TM-I AC 60	Acrylic, round ø 60 cm	6,0 kg	9 - 15 m
TM-I AC 80	Acrylic, round ø 80 cm	6,4 kg	15 - 22 m
TM-I AC 40 X 60	Acrylic, 40 x 60 cm	4,4 kg	9 - 15 m
TM-I AC 60 X 80	Acrylic 60 x 80 cm	6,4 kg	15 - 22 m



Traffic Mirrors MULTI-USE MIRROR UNI-SIG

with or without retro-reflecting marking tape







Video mirror assembly Universal mirror

Application Outdoor and indoor

The UNI-SIG mirror is an economic alternative, used in areas with limited sight: in parking lots, garage exits, and shopping centers.

	Fi	xir	Ig
Po	st	or	Wa

Warranty 2 years

Art. No.	Description	Weight	Viewing distance
	With reflecting fram	le	
US TYP1 4060	Acrylic, 40 x 60 cm	4,3 kg	5 - 7 m
US TYP1 6080	Acrylic, 60 x 80 cm	5,9 kg	9 - 15 m
US TYP1 80100	Acrylic, 80 x 100 cm	9,0 kg	15 - 22 m

Material

Acrylic



Photo: Backside with 2-point universal bracket. Horizontal or vertical use possible. Included in scope of delivery.



Photo: Variant with reflective tape Art. No. US Typ1 60 X 80





Traffic Mirrors			
180° view			- A A A A A A A A A A A A A A A A A A A
Video mirror assembly Universal mirror			
Application Outdoor and indoor	Material Acrylic	Fixing Post or wall	Warranty 2 years

The Explorer wide angle mirror with its convexity of 180° ensures an optimum field of vision. It is ideal to get an overview of production areas or traffic.



Photo: Rear side 2-point universal mount. Horizontal and vertical locking possible. *Included in scope of delivery.*

Art. No.	Description	Weight	Viewing distance
EXPLORER 60	Acrylic, round ø 60 cm	5,2 kg	9 - 15 m
EXPLORER 80	Acrylic, round ø 80 cm	7,0 kg	15 - 20 m





Both mirrors have an especially wide angle of 180° which provides an enlarged view.

The two 180° versions vary in construction. The SUBWAY-mirror can be mounted not only on posts but directly on the wall as well, by means of the fixing ring. This way it can be seamlessly integrated in anderground stations, anderpasses and parking garages, making dark corners safer.

The PANORAMA-mirror additionally disposes of a white frame with green reflectors for better visibility during night-time or bad weather conditions.

Material: The nearly indestructible polycarbonate makes these the perfect mirrors for areas with much vandalism.




Photo: Art. No.: SUBWAY-R steel ring for wall fixing SUBWAYmirror



Photo: Backside 4-point ball joint mounting bracket. Included in scope of delivery.



Video mirror mount 4-point ball joint mount

Art. No.	Description	Weight	Viewing distance
SUBWAY-W	Polycarbonate, ø 60 cm steel ring for wall fixing	6,0 kg	9 - 15 m
SUBWAY	Polycarbonat, ø 60 cm with 4-point joint mounting bracket	6,0 kg	9 - 15 m
TM PC 360	Polycarbonate, ø 60 cm	9,1 kg	15 - 22 m



Traffic Mirrors

no more blind spots



Post or wall



Application Outdoor and indoor

Our wide-angle traffic mirror Trixi helps gain view of blind spots on crossroads where cyclists and pedestrians are in danger of accidents. When turning, drivers see pedestrians or cyclists in the dangerous blind spot where otherwise they would have been overlooked.

Material Acrylic



Photo: High visibility of the cyclist in the dead angle



Warranty

2 years

Photo: Backside with standard fixing (incl. adaptor). *Included in scope of delivery.*



Art. No.	Description	Weight	Viewing distance
TRIXI 35	Acrylic, round ø 35 cm	2,0 kg	1 - 4 m
TRIXI 50	Acrylic, round ø 50 cm	2,7 kg	5 - 7 m
TRIXI 50-H	Acrylic, round ø 50 cm, with heating	4,2 kg	5 - 7 m



Photo: Backside with thermostat



TRAFFIC MIRRORS



ED Traffic mirror



Multi-use mirror



The EUvex-mirrors offer a high-quality mirror image at a low entry price. Whether for traffic, industry, or trade: the EUvex safety mirrors are ideally suited to provide a better view of confusing areas. In contrast to the Dancop mirrors, the EUvex mirrors offer less selection and adjustment options and a smaller product range. The EUvex mirrors are neither TÜV-certified nor wind load certified.

Advantages of EUvex mirrors:

- UV-stable
- Fixing bracket for round posts 50-85 mm included in the delivery
- High quality mirror image
- Easy installation



ED traffic mirrors round



Universal mirrors round



Backside with post fixing



Traffic Mirrors EUvex TRAFFIC MIRRORS





Application	Material	Fixing	Warranty
Outdoor and indoor	Acrylic	Post	2 years

The EUvex traffic mirror increases safety on roads and premises. Due to its robust design it is suitable for long term outdoor use. The type RA2 reflectors ensure good visibility, even in bad weather conditions.

Material:

The EUvex mirror surface is made of PMMA and equipped with red reflectors (Type RA2) on a white frame. It is UV-stable and weatherresistant.



Photo: round type



Photo: Back side with standard post fixing. *Included in scope of delivery.*

Art. No.	Description	Weight	Viewing distance
ED 40 X 60	Acrylic, 40 x 60 cm	3,3 kg	9 - 15 m
ED 60 X 80	Acrylic, 60 x 80 cm	5,1 kg	15 - 22 m
ED 80 X 100	Acrylic, 80 x 100 cm	8,5 kg	22 - 27 m
ED 60	Acrylic, round ø 60 cm	3,7 kg	9 - 15 m
ED 80	Acrylic, round ø 80 cm	5,2 kg	15 - 22 m
ED-Wand- arm	Wall fixing, distance 20 cm	1,9 kg	



Photo: fixing for wall mounting Art. No. ED-Wandarm. Sold separately.



Traffic Mirrors EUvex UNIVERSAL MIRRORS





ApplicationMaterialFixingWarrantOutdoor and indoorAcrylicPost2 years	
--	--

The EUvex universal mirror is equipped with a white frame and very versatile.

Material

The EUvex universal mirror surface is made of PMMA, UV-stable and weather-resistant.



Photo: round version



Photo: Back with standard fixing to the post. *Included in scope of delivery.*

	Art. No.	Description	Weight	Viewing distance
	ED-U 40 X 60	Acryl, 40 x 60 cm	1,8 kg	9 - 15 m
	ED-U 60 X 80	Acryl, 60 x 80 cm	4,0 kg	15 - 22 m
	ED-U 80 X 100	Acryl, 80 x 100 cm	6,6 kg	22 - 27 m
	ED-U 60	Acryl, round ø 60 cm	2,0 kg	9 - 15 m
	ED-U 80	Acryl, round ø 80 cm	4,2 kg	15 - 22 m
	ED-Wandarm	Wall fixing, distance 20 cm	1,9 kg	



Photo: fixing for wall mounting Art. No. ED-Wandarm. Sold separately.

